



# ENCO-METER EM8

## EXTENDIBLE CABLE MEASUREMENT SYSTEM

- Measuring linear distances up to 8 meters
- Any mounting position possible
- Protection class IP51 according to DIN EN 60529
- Anodised and pressurized options available
- The drum shaft can drive any kind of rotary encoder (encoder, potentiometer, ...)
- Stainless steel extendable cable Ø 0.61 AISI316

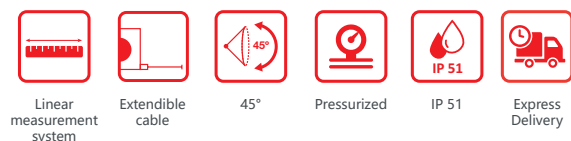


### 90.1808

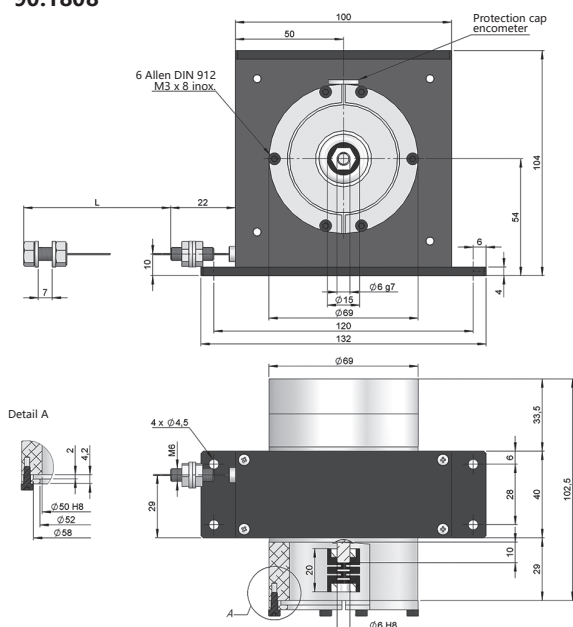

Drawing 90.1808 with standard bell synchro and coupling type 1

### 90.1808.FX

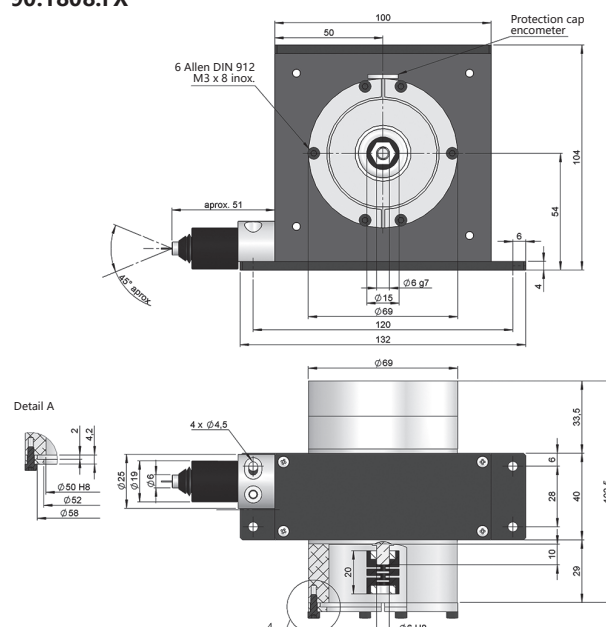

Drawing 90.1808.FX with flexible accessory, standard bell synchro and coupling type 1

## REFERENCE

Serie	Fixing system to sensor + Coupling	Special Customer
90.1808 / 90.1808.FX	. <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	. <input type="checkbox"/> <input type="checkbox"/>
90.1808. Standard	SY1. Standard bell synchro + PFP 1520 06/06	AW. Inverted caps (*)
90.1808.FX. Flexible accessory	SY2. Standard bell synchro + PFP 1520 06/6.35	BF. Outdoor (Anodised 5µm)
	CL3. Clamping bell + PFP 2224 06/10	BL. Saline environment (Anodised 20µm)
		BD. Pressurized

Request the ENCO-METER already coupled to an electronic output device that could be an Incremental Optical Encoder, Multiturn Absolute Optical Encoder, Potentiometer or Multiturn Absolute Magnetic Encoder.

(\*) Only available with the standard version.



# ENCO-METER EM8

## EXTENDIBLE CABLE MEASUREMENT SYSTEM

### TECHNICAL SPECIFICATIONS


MODEL	EM8
Reference	90.1808 / 90.1808.FX
Travel	250 mm ±0.06 / per turn
Cable (*)	Ø 0.61 stainless steel AISI316 (structure 19 x 7 + 0)
Measurement range, up to (mm)	8000
Maximum cable extension (mm)	8010
Minimum cable static tension	6 N
Maximum cable static tension	13 N
Maximum extension acceleration	30 m/s <sup>2</sup>
Maximum recovery acceleration	12 m/s <sup>2</sup>
Maximum speed	0.75 m/s

Protection against dust and splashes according to DIN EN 60529

IP51

(\*) Other types of cables are possible on special order.

### FLEXIBLE ACCESSORY (FX)




ENCO-METERS with flexible accessory FX (90.1404.FX, 90.1808.FX, 90.1810.FX) allow a misalignment of the extendable cable up to 45°.

### ANODISED OPTIONS

+ **Special Customer BF:** 5 microns anodised housing for using in outdoor environments.

+ **Special Customer BL:** 20 microns anodised housing protected against the aggressive effect of the saltwater air.

### INSTALLATION

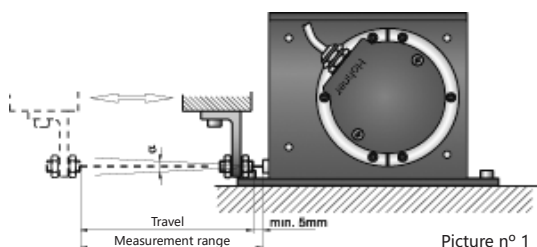

Picture n° 1

ENCO-METER units are secured to a flat machine surface by means of three or four M4 screws. The cable must be correctly aligned and under no circumstances must it exceed the measurement range.

Special customer AW for inverted caps.

EM 90.1808:  $\alpha < 2^\circ$  | EM 90.1808.FX:  $\alpha < 45^\circ$

### OUTPUT DEVICES

We can also supply the draw wire system already coupled to an electronic output device that could be an incremental encoder, absolute encoder or potentiometer.

#### + ABSOLUTE OR INCREMENTAL ENCODER

If it is required to obtain a determined resolution "r" (mm per pulse) in the case of using an absolute or incremental encoder, the number of encoder pulses (n) will be:

$$n = \frac{D}{r} \quad (D \text{ is ENCO-METER travel in mm})$$

#### + POTENTIOMETER

Using a potentiometer, an output "r" ratio (in  $\Omega$  per mm) is obtained in accordance with:

$$r = \frac{R}{D \cdot n} \quad (R \text{ is the rated resistance and } n \text{ is the maximum number of turns})$$

As standard, we have potentiometers of  $R = 10K\Omega$  and  $n = 10$  turns. It must be taken into consideration that the mechanical travel of the potentiometer may limit the ENCO-METER measurement range.

**i** Electronic output devices that are delivered coupled to an ENCO-METER have an orientation of 45°. See Installation picture n° 1.

**i** If devices are not supplied assembled, we recommend mounting the sensor on the ENCO-METER without the seal.



# ENCO-METER EM8

## EXTENDIBLE CABLE MEASUREMENT SYSTEM

### FIXING SENSOR SYSTEM DIMENSIONS


Fixing system to  
sensor type CL  
Clamping bell

Coupling type 3  
PFP 2224 06/10

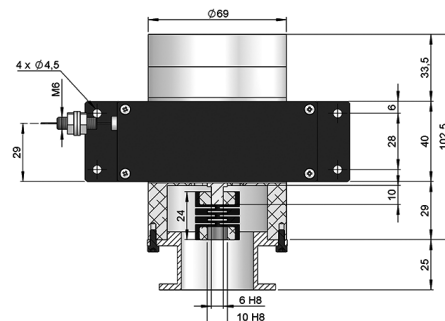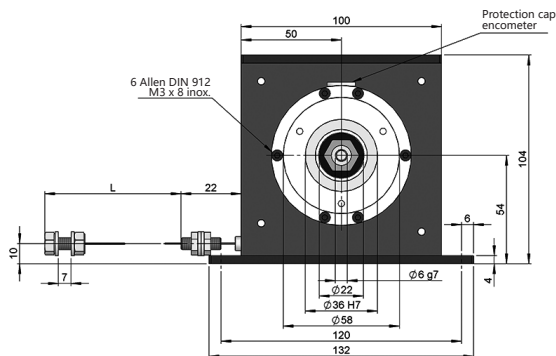


### SPECIAL CUSTOMER OPTIONS

#### AW - Inverted caps

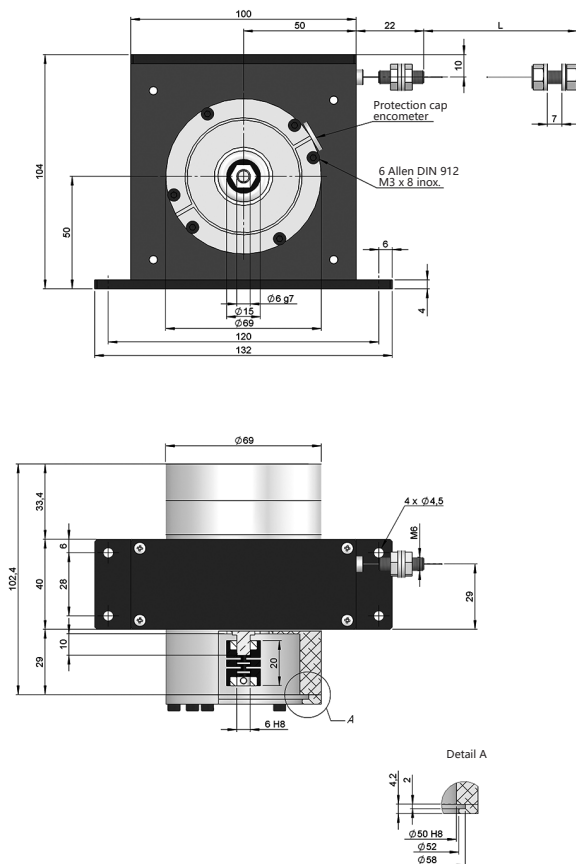

Drawing 90.1808, Special Customer AW

#### BD - Pressurized option

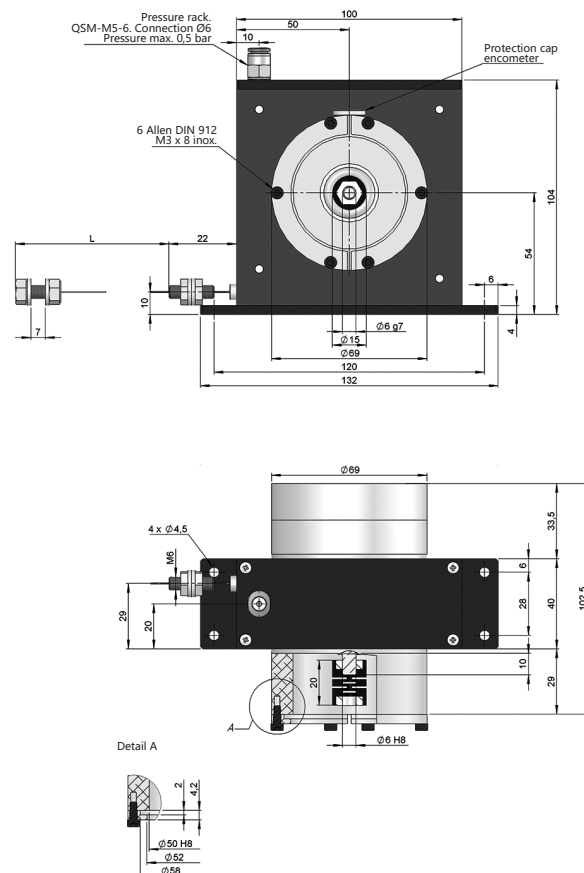

Drawing 90.1808, Special Customer BD