

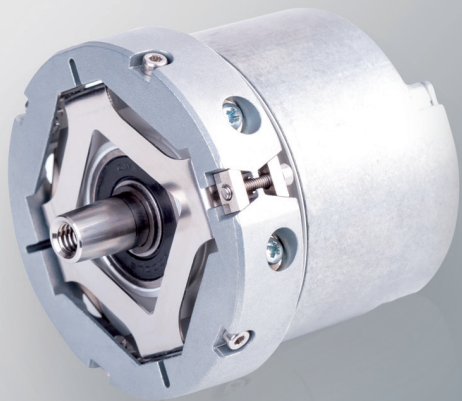


Image with Expanding coupling 90.1101



SERIE 64

CONIC SHAFT INCREMENTAL ENCODER FOR INDUSTRIAL APPLICATIONS

- Resolution up to 10000 pulses per turn
- External diameter 58 mm
- Conic shaft 1:10
- Protection class IP54 according to DIN EN 60529
- Anti-rotation system through flexible flange, pin torque support or expanding coupling
- Connection by cable (other cable length available)



Optical Encoder



Incremental Encoder



High shaft load capacity



Vibration and shock resistant



IP54




Temperature range
- 40°C




Express Delivery

Expanding coupling (90.1101)

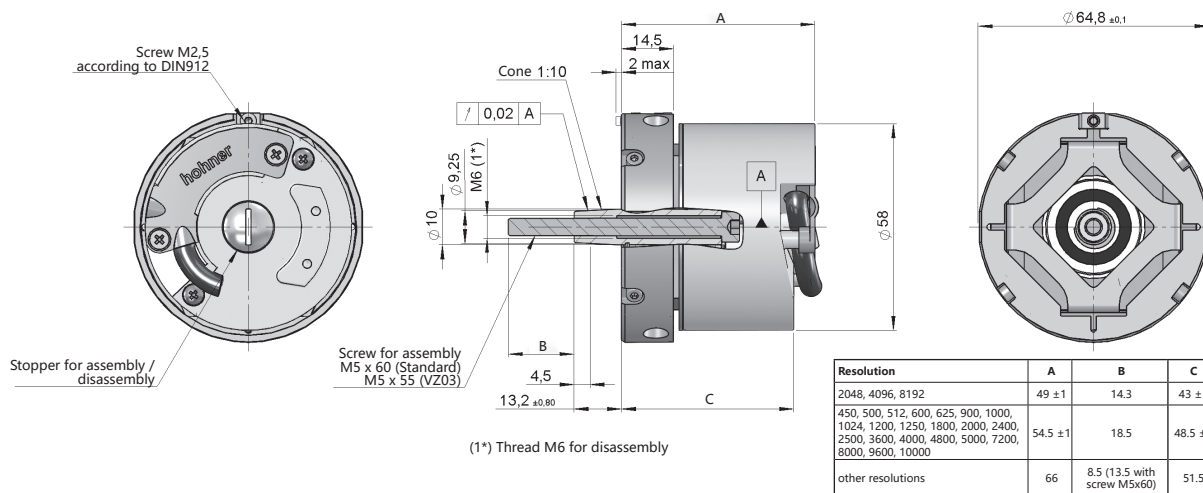


Drawing conic shaft 1:10, anti-rotation system type 0, connection type 1

Flexible flange (90.1027)

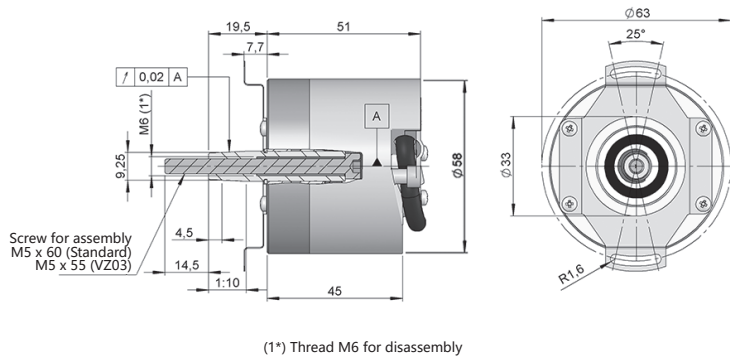

Drawing conic shaft 1:10, anti-rotation system type 1, connection type 1

Anti-turn stick (90.1041)

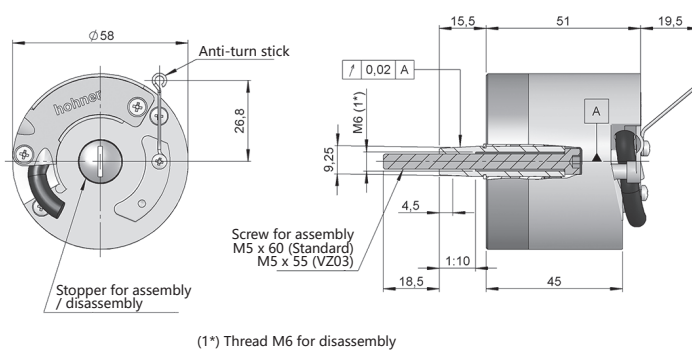

Drawing conic shaft 1:10, anti-rotation system type 2, connection type 1



SERIE 64

CONIC SHAFT INCREMENTAL ENCODER FOR INDUSTRIAL APPLICATIONS

REFERENCE							Reference example: 64-11111-1024
Serie	Conic shaft	Anti-rotation system	Output signals	Connection	Power Supply / Electronic output	Pulses number	Special customer
64 -	☐	☐	☐	☐	☐ -	☐ ☐ ☐ ☐ ☐ ☐	☐ ☐ ☐ ☐ ☐ ☐
	1. Conic 1:10	0. Expanding coupling 90.1101 1. Flexible flange 90.1027 2. Anti-turn stick 90.1041 3. None (*)	1. ABZ, $\overline{ABZ}$ 2. AB, $\overline{AB}$	1. Helicoidal cable	0. 11...30 VDC / NPN Open collector 11..30 VDC (**) 1. 11..30 VDC / Line driver differential Push-Pull 11..30 VDC 2. 5 VDC / RS422 5 VDC (compatible TTL) 6. 11...30 VDC / RS422 5 VDC (compatible TTL)		VT00. -40°C VZ03. Screw for assembly M5x55 95.0004099

Order your reference Step file 3D
info@encoderhohner.com
service available in 24 h

(*) Anti-rotation systems type 0 (Expanding coupling 90.1101) and 1 (Flexible flange 90.1027) supplied assembled.

anti-rotation system type 2 (Anti-turn stick 90.1041) is supplied disassembled and includes the screws required for assembly.

Other required anti-rotation systems are not supplied assembled. All systems available in the sections "MOUNTING ACCESSORIES".

(**) Only available for anti-rotation system type 1, 2 and 3.



Assembly and disassembly instruction manual available in:
www.encoderhohner.com/product/serie-64/





MECHANICAL SPECIFICATIONS

Materials	Cover: Zamac Housing: Aluminium Shaft: Stainless Steel
Bearings	Ballraces
Bearings lifetime	1x10 ¹⁰ rev.
Housing fixing	Expanding coupling 90.1101 (assembled) Flexible flange 90.1027 (assembled) Anti-turn stick 90.1041 (self-assembly kit included)
Permitted misalignment	±0.5 mm axial (90.1101) ±0.5 mm axial, ±0.3 mm radial (90.1027, 90.1041)
Maximum number of revolutions permitted mechanically	6000 rpm
Protection against dust and splashes according to DIN EN 60529	IP54
Rotor inertia moment	≤ 3x10 ⁻⁶ Kgm ²
Starting torque at 20°C (68°F)	≤ 0.02 Nm
Maximum load permitted on axial shaft	40 N
Maximum load permitted on radial shaft	60 N
Weight aprox.	0.5 Kg
Operating temperature range	-20°C to +80°C - Standard -40°C to +80°C - Special Customer VT00
Vibration according to DIN EN 60068-2-6	100 m/s ² (10Hz...2000Hz)
Shock according to DIN EN 60068-2-27	1000 m/s ² (6ms)
Maximum pulses per turn	10000
Helicoidal cable	2 meters cable (other cable lengths available or connector mounted at the end of the cable, upon request)

SERIE 64

CONIC SHAFT INCREMENTAL ENCODER FOR INDUSTRIAL APPLICATIONS

OUTPUT SIGNALS



OUTPUT CIRCUIT	NPN Open Collector	Push-Pull Differential	RS422 (TTL compatible)	RS422 (TTL compatible)
Reference code	0	1	2	6
Power supply	11...30 VDC	11...30 VDC	5 VDC $\pm 10\%$	11...30 VDC
Output voltage	11...30 VDC	11...30 VDC	5 VDC	5 VDC
Consumption	40 mA	Typical: 45 mA Max: 150 mA	Typical: 70 mA Max: 150 mA	Typical: 80 mA Max: 160 mA
Max. load capability / channel	40 mA	± 30 mA	± 20 mA	± 20 mA
Length of cable allowed	50 m (24 VDC)	100 m	1200 m	1200 m
"Low" signal level	VOL < 0.4 VDC (24 VDC)	VOL < 2.5 VDC	VOL < 0.5 VDC	VOL < 0.5 VDC
"High" signal level	VOH > 22 VDC (24 VDC)	VOH > VCC – 3 VDC	VOH > 2.5 VDC	VOH > 2.5 VDC
Frequency	100 kHz	200 kHz	300 kHz	300 kHz
Short circuit protection	Not permanent	Yes	Yes	Yes
Protection polarity inversion	Yes	Yes	Not permanent	Yes

Channel B leads (90° electric) channel A, view from the shaft, shaft rotating clockwise

CONNECTION



	Cable 3x2x0.14+2x0.34 95.0008003
GND	Black (BK)
+UB	Red (RD)
A	Yellow (YE)
B	Green (GN)
$\bar{A}$	Brown (BN)
$\bar{B}$	Blue (BU)
Z	Grey (GY)
$\bar{Z}$	Orange (OG)
Case	Shield

SERIE 64

CONIC SHAFT INCREMENTAL ENCODER FOR INDUSTRIAL APPLICATIONS

ACCESSORIES

Screw for disassembly (included)



95.0004105
M5x60
(Standard)



95.0004099
M5 x 55
(Special Customer VZ03)

Screw for disassembly (not included)





95.0004106
M6x55




95.0004420
Grub screw M5 x 20
45H DIN913

ANTI-ROTATION SYSTEMS DIMENSIONS



Flexible flange
90.1020

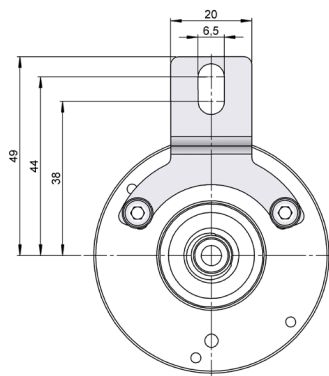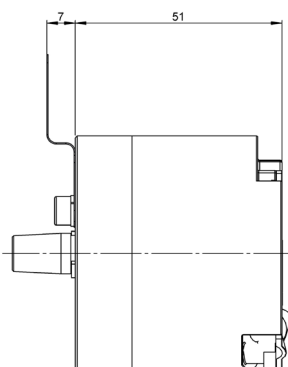

90.1020



Flexible flange
90.1024

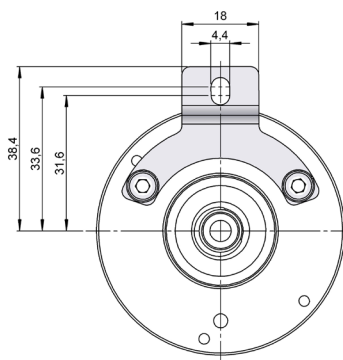


90.1024




SERIE 64

CONIC SHAFT INCREMENTAL ENCODER FOR INDUSTRIAL APPLICATIONS


Flexible flange
90.1026

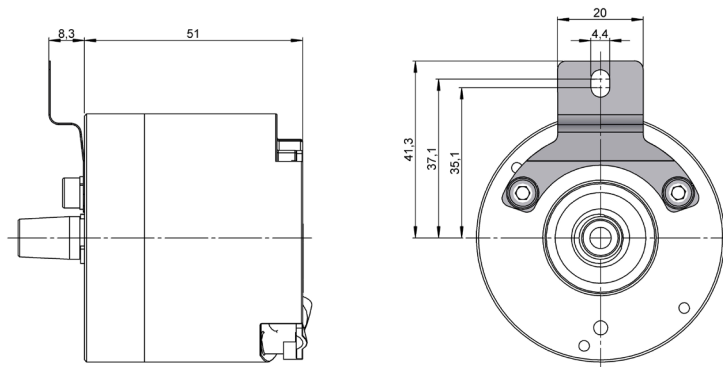


90.1026




Flexible flange
90.1039

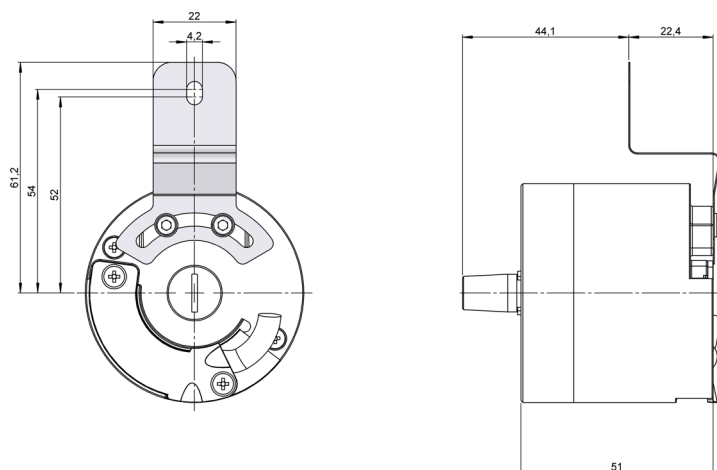


90.1039



Flexible flange
90.1045

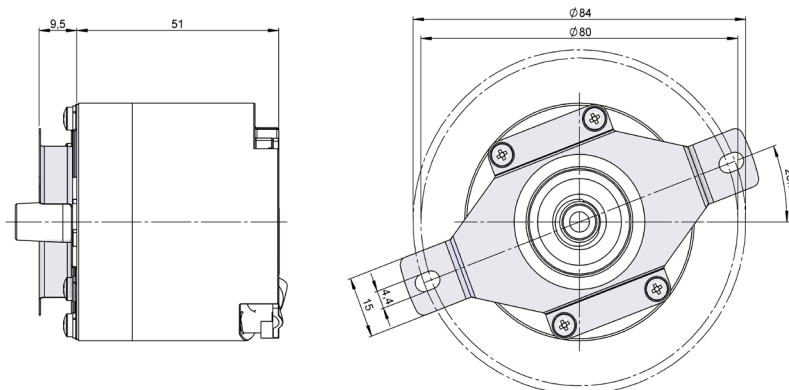


90.1045



SERIE 64


CONIC SHAFT INCREMENTAL ENCODER FOR INDUSTRIAL APPLICATIONS

Flexible flange
90.1046

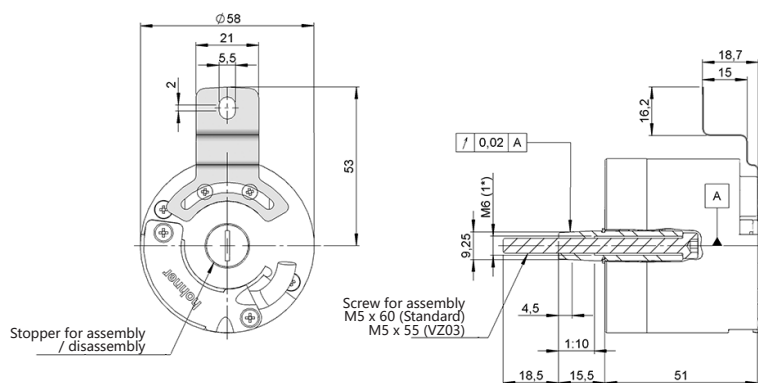


(1*) Thread M6 for disassembly


90.1046




Flexible flange
90.1071

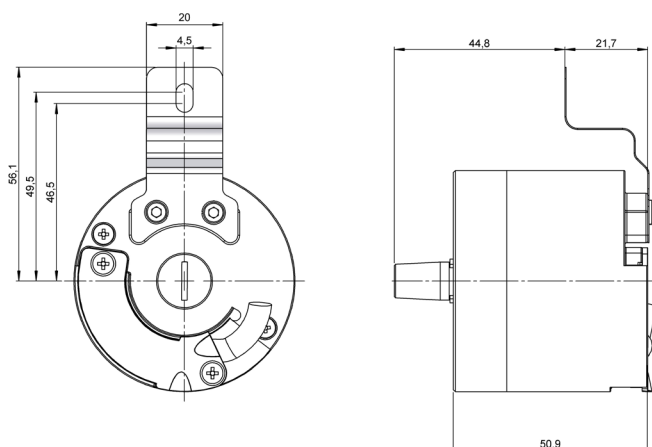


90.1071



Flexible flange
90.1072

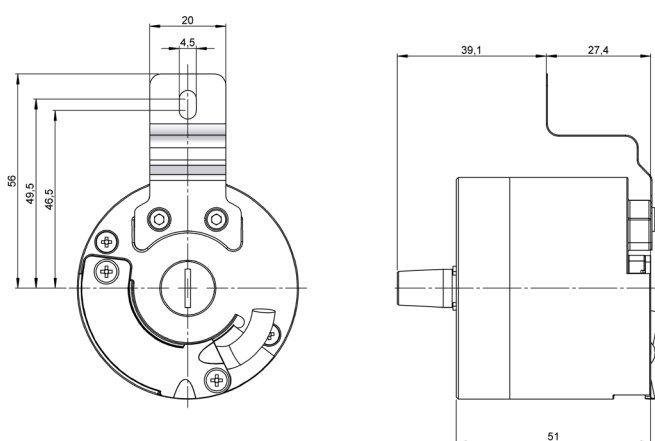


90.1072




SERIE 64

CONIC SHAFT INCREMENTAL ENCODER FOR INDUSTRIAL APPLICATIONS


Flexible flange
90.1086

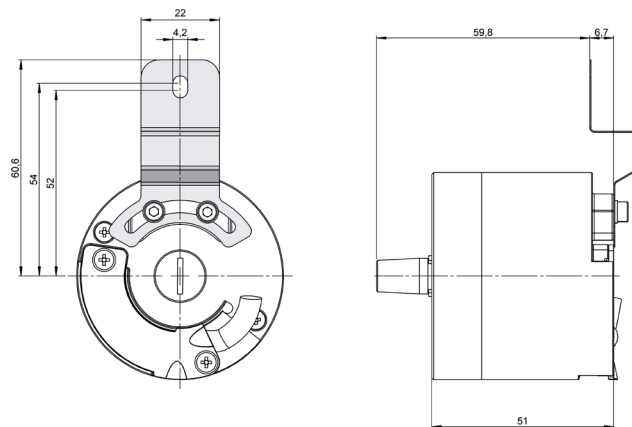

90.1086



Flexible flange
90.1095

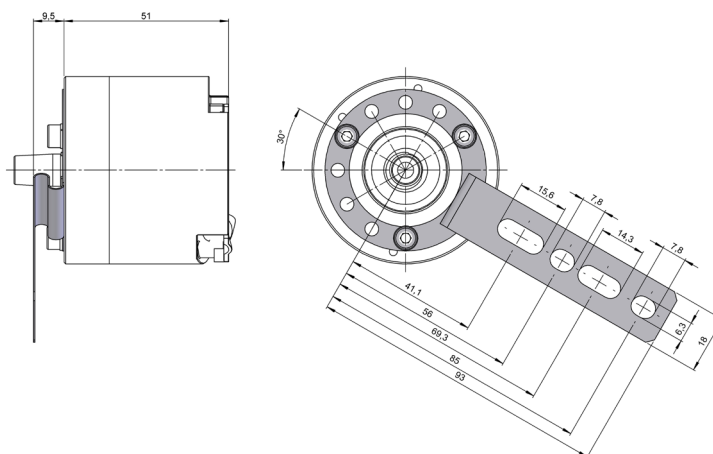

90.1095

